








HIGH FLOW FILTER CARTRIDGE

High Flow Filter GV Cartridges combine the capacity of the filter bags to handle high flow rates. The filtering surface of pleated cartridges, guarantee high efficiency and low leakage in all applications whether they are industrial or thanks to they FDA certification on more delicate tasks.

OIL & GAS	CHEMICAL & PETROLCHEMICAL	WATER TREATMENT	ENERGY	FOOD & PHARMA	INDUSTRIAL
					

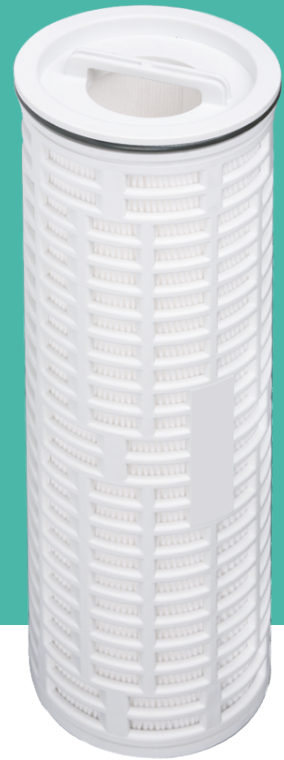

Applications

Oil & Gas

- Refinery Process Fluids • Off-shore Water Injection • Ammine Filtration

Chemical & Petrochemical

- Process Fluids • Gas Treatment • Water Treatment • Prefiltration • Industrial Process Water Filtration • Softening System Protection

Power Generation

- Process Fluids • Gas Separation • Water Treatment

Food & Farma

- Prefiltration

Technical Data

Micron Ratings (μ): **1, 5, 10, 20, 40, 70**

Lengths ("): **20, 40, 60**

Outer Diameter ("): **6**

Glass Fiber Maximum Operating Temperature (°C): **121**


Polypropylene Maximum Operating Temperature (°C): **82**

Maximum Operating Pressure Differential (bar): **3.4**

Maximum Recommended Changeout

Pressure Differential (bar) at Temperature (°C): **2.4 at 20**

Ordering Info

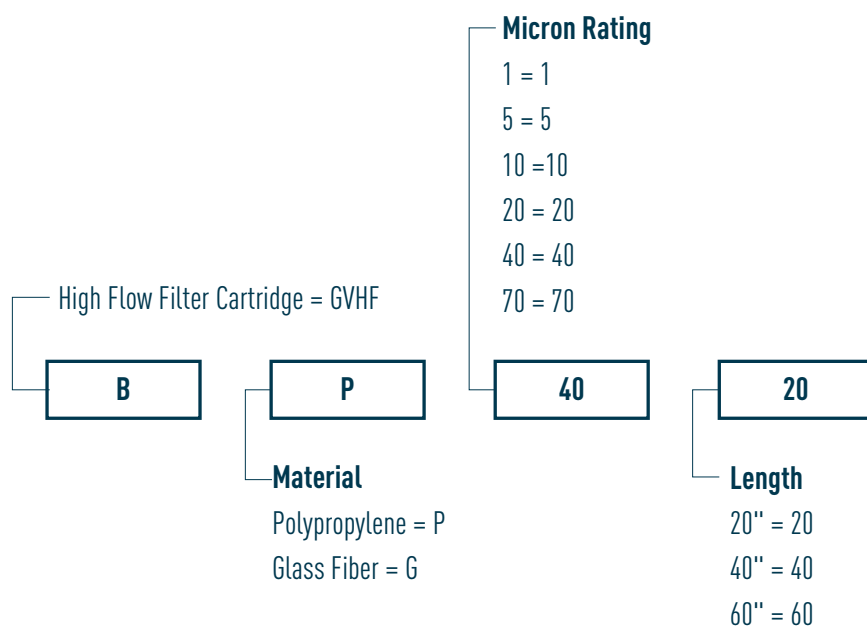

* Contact **GV Filtri** for more information about Materials and Dimensions availability