

MULTI BAG FILTER HOUSING







The multi bag filter housings are designed to meet high flow rates while maintaining the practicality and low economic impact of the filter bags.

Our range of mult sbag filters unlike other similar products on the market, ensures complete separation between the dirt chamber and the clean chamber, as the bag collar seat is made on a flange obtained by mechanical machining.

Our multi bag filters are manufactured in accordance with our high quality standards and in accordance with PED Directive 97/23 / EC and the most common international standards.

Multibag filters are available in both standard and special versions to ensure suitability for the application.



OIL & GAS	CHEMICAL & PETROLCHEMICAL	WATER TREATMENT	ENERGY	FOOD & PHARMA	INDUSTRIAL
					

Applications

Oil & Gas

- Refinery Process Fluids

Chemical & Petrolchemical

- Process Fluids • Solvent

Water Treatment

- Pre-filtration • Industrial Process • Water Filtration • Softening System Protection

Power Generation

- Process Fluids • Gas Separation & Treatment • Water Treatment




Food & Farma

- Cosmetic • Pre-Prefiltration • Beverage And Water • Dairy • Chocolate

Industrial


- Paints And Inks Production • Cataforesi • Mechanic Industry • Paper Mills • Textile Industry

Features

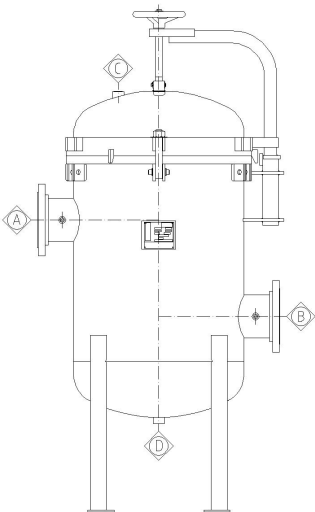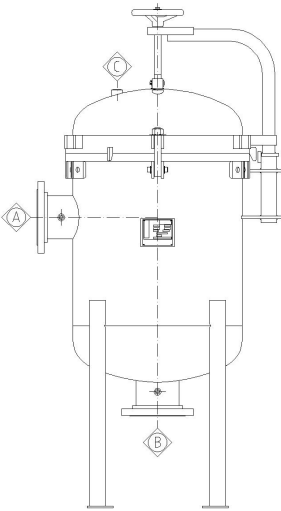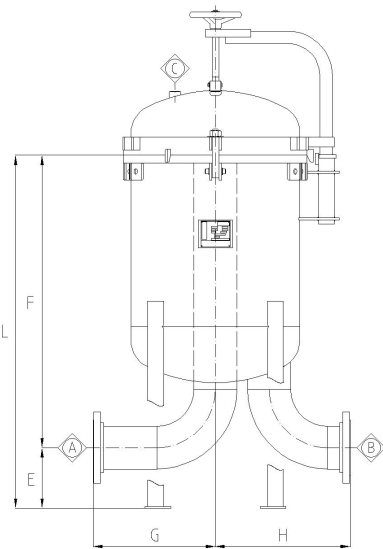

Multiple bag Filter Series			Max Operating Pressure	Dimensions					Connections		Volume Liters	Weight kg	Out/Put Liters / h
Model	N° Bags	Type Bags		E	F	L	G	H	A-B	C			
GPSM	4	1	10 bar @ 60° C	250	700	950	400	450	4"	1/2	120	150	80.000
	4	2		250	1040	1290	400	450	4"	1/2	200	165	120.000
	5	2		250	1365	1290	400	450	5"	1/2	250	205	150.000

Ordering Info

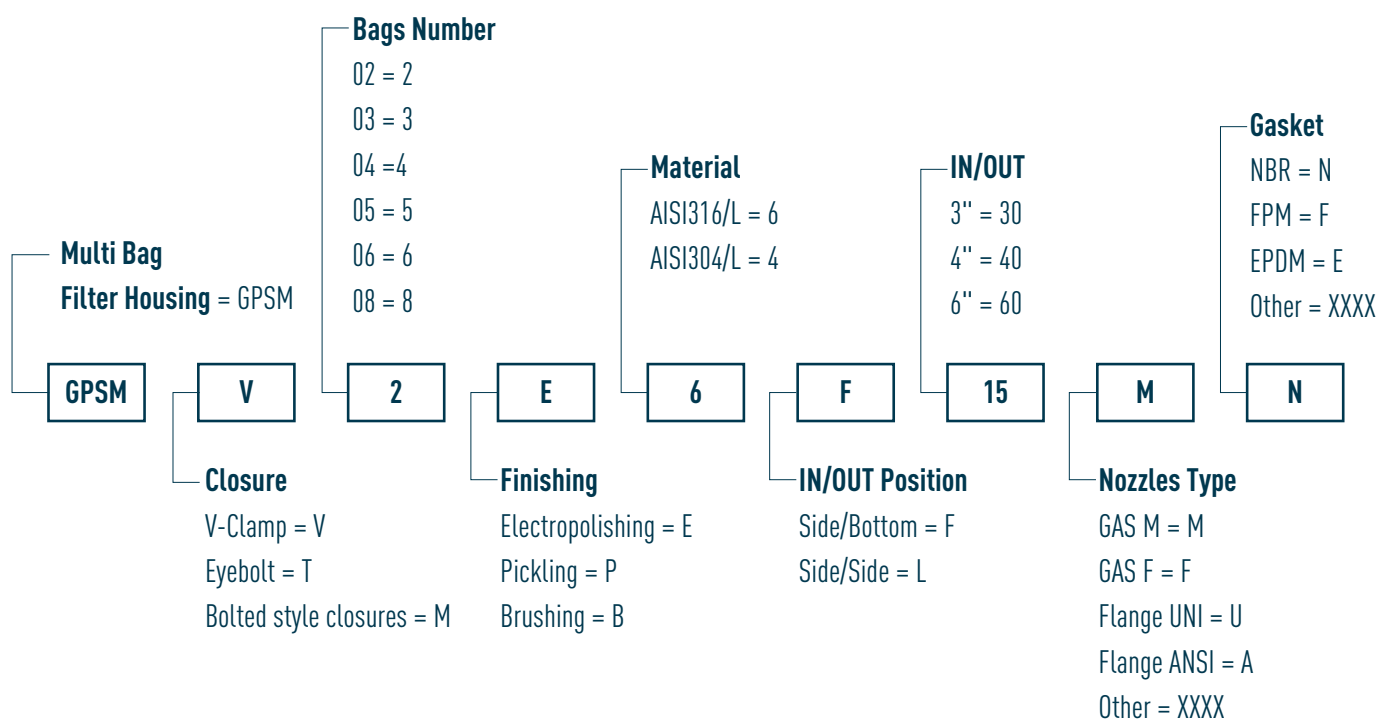

* Contact **GV Filtri** for more information about Materials and Dimensions availability