


BAG FILTERS

Bag Filters can be made of polypropylene, polyester and nylon.

The bag finishes are all with heavy and double seams to give strength and reliability to the bag so this ensures that there is no passage of particles outside the bag.

They can be supplied in various configurations such as oil absorption and high flow.

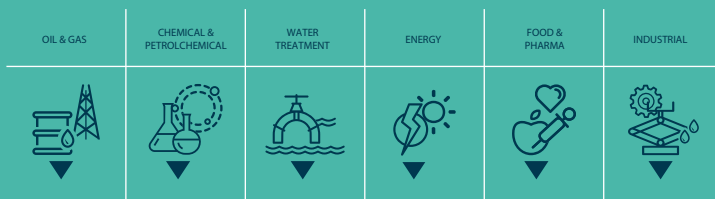

Applications

Oil & Gas

- Refinery Process Fluids

Chemical & Petrolchemical

- Process Fluids • Solvent

Water Treatment

- Pre-filtration • Industrial Process Water Filtration • Softening System Protection

Power Generation

- Process Fluids • Gas Separation • Water Treatment

Food & Farma

- Cosmetic • Pre-Prefiltration • Dairy • Chocolate

Industrial



- Paints And Inks Production • Cataforesi • Mechanic Industry • Paper Mills • Textile Industry

Compatibility


Solution	Polypropylene	Polyester	Nylon
Organic Solvents	✓✓✓✓	✓✓✓✓	✓✓✓✓
Oils	✓✓✓✓	✓✓✓✓	✓✓✓✓
Micro-organisms	✓✓✓✓	✓✓✓✓	✓✓✓✓
Alkalines	✓✓✓	✓✓✓✓	✓✓✓
Organic Agents	✓✓✓	✓	✓✓
Oxidising agents	✓✓✓	✓✓✓	✓
Mineral Acids	✓✓✓	✓✓✓	✓

Dimensions


Size 1
 OD: 180 mm
 Length: 410 mm
 Area: 0.23 m²

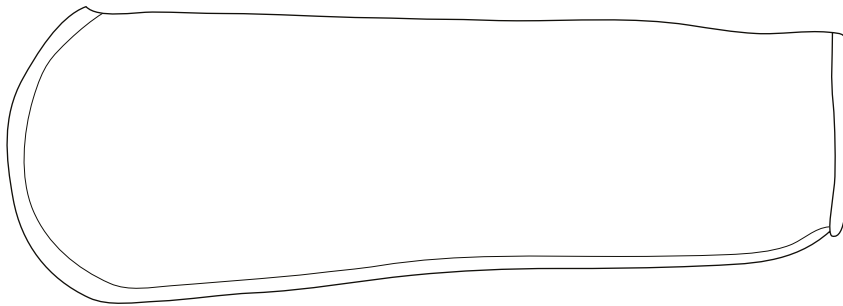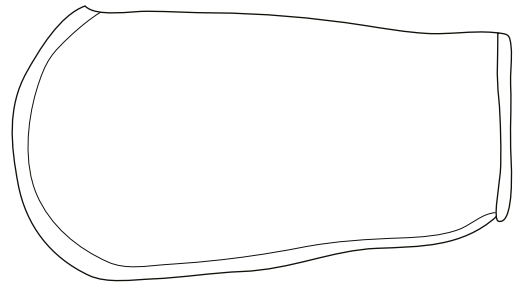

Size 2
 OD: 180 mm
 Length: 830 mm
 Area: 0.41 m²

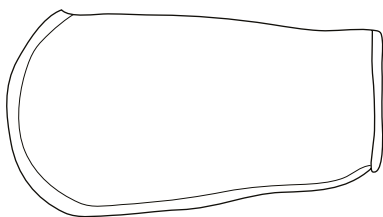

Size 3
 OD: 104 mm
 Length: 250 mm
 Area: 0.07 m²

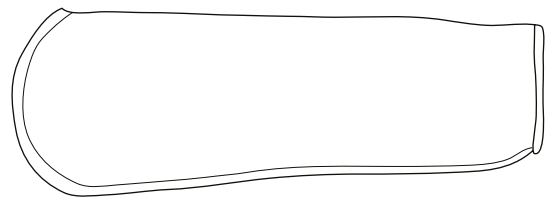

Size 4
 OD: 104 mm
 Length: 380 mm
 Area: 0.12 m²

Technical Data

- Materials of construction: Polypropylene, Polyester, Nylon, *
- Micron ratings: From 1 to 1000 micron, *
- Lengths: Available in 4 standard size and also **custom size**
- Max operating temperature Polypropylene 95°C
- Max operating temperature Polyester 150°C
- Max operating temperature Nylon 160°C
- Each bag includes a handle for fast, easy and cleaner removal
- Our bags can be used in the most common filter bag housing

* Contact GV Filtri for more information about Materials and Dimensions availability

Ordering Info

